

AC 5E



SIZE :

170x150x55mm (6.69"x5.91"x2.17")

CONSTRUCTION :

- Die-cast aluminum housing
- Metal impeller or
Glass fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Leader wire available

OPERATING TEMPERATURE :

Ball bearing - 30°C to +75°C

WEIGHT :


1000 grams

Specifications


Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE	FREQUENCY	MAX. RATED CURRENT	MAX. INPUT POWER	SPEED	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE
		VAC	Hz	mA	W	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	
5E-115B	Ball	115	50/60	640/540	48/46	2750/3100	4.9/5.6	173/197	12/14	0.5/0.6	54/58
5E-200B	Ball	200	50/60	300/280	46/44	2700/3000	4.9/5.6	173/197	12/14	0.5/0.6	54/58
5E-230B	Ball	230	50/60	300/280	46/44	2750/3100	4.9/5.6	173/197	12/14	0.5/0.6	54/58
5E-240B	Ball	240	50/60	300/280	46/44	2750/3100	4.9/5.6	173/197	12/14	0.5/0.6	54/58
5P-115B	Ball	115	50/60	640/540	48/42	2850/3400	4.2/4.8	149/171	12/12	0.5/0.5	50/53
5P-230B	Ball	230	50/60	280/240	46/40	2850/3400	4.2/4.8	149/171	12/12	0.5/0.5	50/53
5P-240B	Ball	240	50/60	200/180	46/41.4	2850/3400	4.2/4.8	149/171	12/12	0.5/0.5	55/59
5E-380B	Ball	380	50/60	300/280	46/44	2750/3100	4.9/5.6	173/197	12/14	0.5/0.6	54/58
5E-DVB-1	Ball	100/200	50/60	620/330	50/45	2700/3000	4.6/4.8	162/171	14/13	0.5/0.6	55/59
5E-DVB-230	Ball	230	50/60	310	47	2750/3100	5.5/5.0	160/175	12/10	0.5/0.4	56/58

Dimensions (mm)

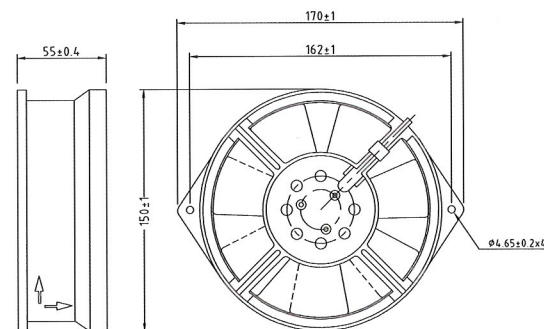

Performance Curve

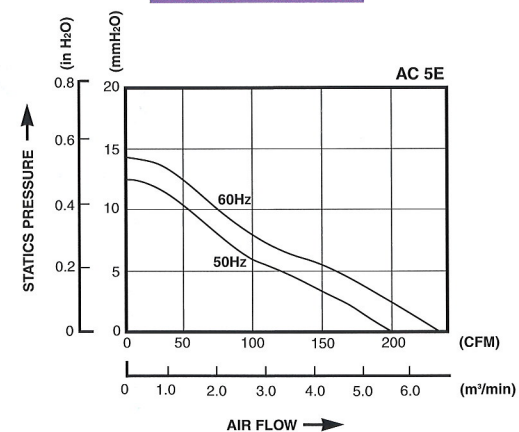

AC 5E Laser welding



SIZE :

170x150x55mm (6.69"x5.91"x2.17")

CONSTRUCTION :

- Die-cast aluminum housing
- Metal impeller or
Glass fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Leader wire available
(between frame and terminal)

OPERATING TEMPERATURE :

Ball bearing - 30°C to +75°C

WEIGHT :


1000 grams

Specifications

Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE	FREQUENCY	MAX. RATED CURRENT	MAX. INPUT POWER	SPEED	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE
		VAC	Hz	mA	W	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	
5E-115B	直焊 Ball	115	50/60	640/540	48/46	2750/3100	5.7/6.8	200/240	13.0/15.5	0.5/0.6	52/56
5E-230B	直焊 Ball	230	50/60	300/280	46/44	2750/3100	5.7/6.8	200/240	13.0/15.5	0.5/0.6	52/56
5E-230B	RD Ball	230	50/60	300/280	46/44	2750/3100	5.7/6.8	200/240	13.0/15.5	0.5/0.6	52/56
5E-380B	直焊 Ball	380	50/60	300/280	46/44	2750/3100	5.7/6.8	200/240	13.0/15.5	0.5/0.6	52/56

Dimensions (mm)

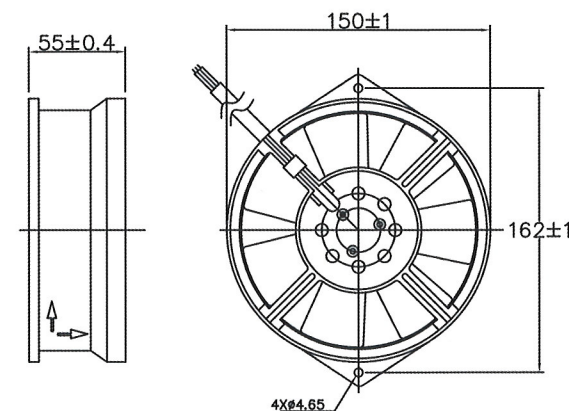

Performance Curve

