

AC 6E Ellipse Frame



SIZE :

172x150x51mm (6.69"x5.91"x2.01")

CONSTRUCTION :

- Die-cast aluminum housing
- Metal Impeller
- Capacitor-start motor
- Thermal
- Leader wire available

OPERATING TEMPERATURE :

Ball bearing - 30°C to +75°C

WEIGHT :


970grams

Specifications


Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE VAC	FREQUENCY Hz	MAX. RATED CURRENT mA	MAX. INPUT POWER W	SPEED R.P.M.	MAX. AIR FLOW m³/min CFM	MAX. AIR PRESSURE mmH₂O IN H₂O	NOISE dB-A
6E-230HBC	Ball	230	50/60	160/180	34/38	2800/3300	6.8/7.79 240/275	14.5/16.5 0.57/0.65	58/60
6E-380HBC	Ball	380	50/60	86/98	32/35	2800/3300	6.8/7.79 240/275	14.5/16.5 0.57/0.65	58/60


Dimensions (mm)

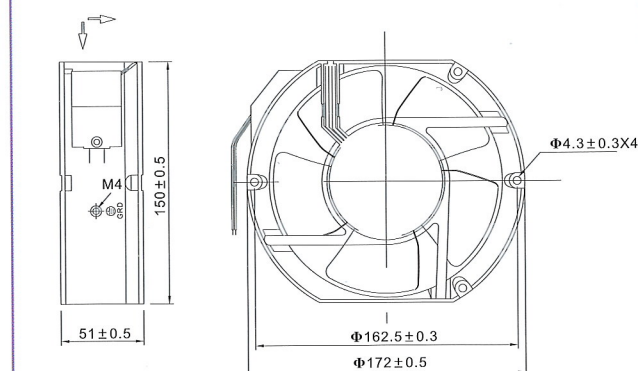

Performance Curve

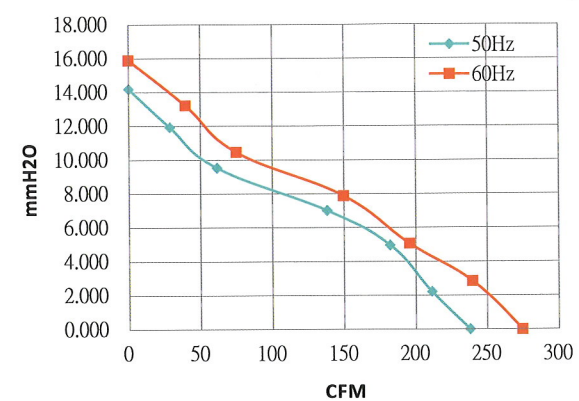

AC 8P

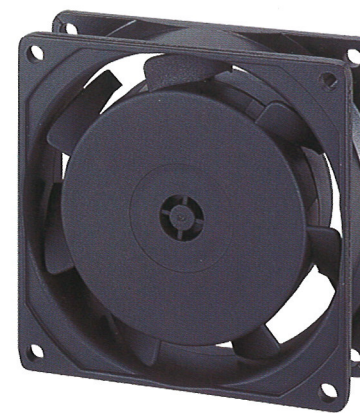

SIZE :

80x80x25mm (3.15"x3.15"x0.98")

CONSTRUCTION :

- Die-cast aluminum housing
- Glass fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Impedance protected
- Leader wire or Terminal is available

OPERATING TEMPERATURE :

Ball bearing - 30°C to +75°C

Sleeve bearing - 10°C to +70°C

WEIGHT :


260 grams

Specifications

Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE VAC	FREQUENCY Hz	MAX. RATED CURRENT mA	MAX. INPUT POWER W	SPEED R.P.M.	MAX. AIR FLOW m³/min CFM	MAX. AIR PRESSURE mmH₂O IN H₂O	NOISE dB-A
8P-115LB 8P-115LS	Ball Sleeve	115	50/60	140/130	14/13	1900/2400	0.4/0.5 13.8/17.5	2.1/3.2 0.1/0.1	21/25
8P-115HB 8P-115HS	Ball Sleeve	115	50/60	150/140	16/14	2500/3000	0.5/0.6 17.3/21.0	3.1/4.4 0.1/0.2	30/35
8P-200HB	Ball	200	50/60	130/120	21/18	2500/3000	0.5/0.6 17.3/21.0	3.1/4.4 0.1/0.2	30/32
8P-230LB 8P-230LS	Ball Sleeve	230	50/60	80/70	16/15	1900/2400	0.4/0.5 13.8/17.5	2.1/3.2 0.1/0.1	21/25
8P-230HB 8P-230HS	Ball Sleeve	230	50/60	95/85	18/16	2500/3000	0.5/0.6 17.3/21.0	3.1/4.4 0.1/0.2	30/35

Dimensions (mm)

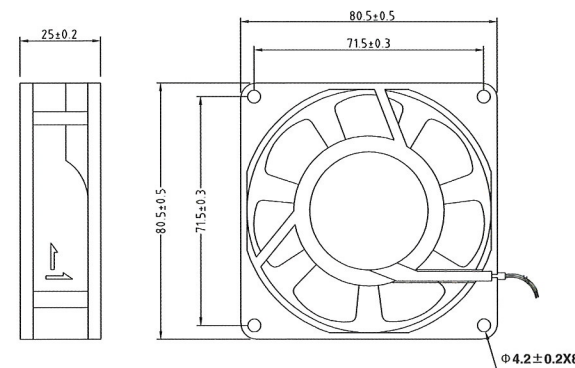

Performance Curve

